

Hasil Plagiasi Numerical Comparison of B20 Biodiesel and Petroleum Diesel in terms of Performance, Combustion, and Emission at Constant Speed

By. Betty Ariani, Dedy Wahyudi

Submission date: 28-Dec-2022 01:47PM (UTC+0700)

Submission ID: 1987044214

File name: Ariani_2022_IOP_Conf._Ser._Earth_Environ._Sci._1095_012018.pdf (940.5K)

Word count: 2747

Character count: 14388

PAPER · OPEN ACCESS

Numerical Comparison of B20 Biodiesel and Petroleum Diesel in terms of Performance, Combustion, and Emission at Constant Speed

To cite this article: Betty Ariani and Dedy Wahyudi ⁶ 2022 *IOP Conf. Ser.: Earth Environ. Sci.* **1095** 012018

⁶ View the [article online](#) for updates and enhancements.

You may also like

- ⁷ [Green fuel utilization for diesel engine, combustion and emission analysis fuelled with CNSQ diesel blends with Diethyl ether as additive](#)
Ashok Kumar, K. Rajan, K.R. Senthil Kumar et al.
- ⁷ [Effects of piston and cylinder swirl generation on the performance of ceiba pentandra and nigella sativa B20 biodiesel blended diesel engine operation](#)
S G Pradeep, N R Banapurmath, Y H Basavarajappa et al.
- ⁸ [Improvement in the performance of Karouba blended diesel fuel using Di-Ethyl Ether and Di-Methyl Carbonate as additives in a CRDI engine](#)
V Mathan Raj, Abhinav Chaitanya and Harsh Thakur



The Electrochemical Society
Advancing solid state & electrochemical science & technology

243rd ECS Meeting with SOFC-XVIII

More than 50 symposia are available!

Present your research and accelerate science

Boston, MA • May 28 – June 2, 2023

[Learn more and submit!](#)

Numerical Comparison of B20 Biodiesel and Petroleum Diesel in terms of Performance, Combustion, and Emission at Constant Speed

Betty Ariani, Dedy Wahyudi

Naval Architecture, Faculty of Engineering, Universitas Muhammadiyah Surabaya

Betty.ariani@gmail.com

Abstract. To achieve energy efficiency and emission reduction in the shipping sector use of alternative marine fuel is one of the programs implemented. This study on alternative fuels is an active response to increasingly stringent emission regulations and the limited supply of fossil fuels. In addition, an operational feasibility study is an important thing. The method used in this research is computational fluid dynamics to see how the engine performance, combustion, and emissions when using biodiesel B20 at a constant speed of 2200 Rpm compared to when using petroleum diesel. From the results of the numerical comparison study, the use of B20 compared to petroleum diesel, there was an increase in engine performance the level of fuel consumption was higher. The use of B20 causes CO and UHC emissions to decrease while NO_x increases compared to petroleum diesel.

Key words : Alternative Fuel, Biodiesel, Diesel, Emission, Marine Fuel,

1. Introduction

Using diesel engines is becoming increasingly popular because of its advantages, like better brake thermal efficiency and high output power, relatively lower fuel consumption levels, and quite acceptable reliability. The role of diesel engines in the shipping sector is also very dominant due to their better efficiency compared to gasoline engines. However, diesel engines still have problems, namely emissions and their availability which continues to decrease. The shipping sector has been one of the contributors to emissions that cause air pollution [1] reported by Bows-Larkin [2] that the shipping sector has contributed 2-3% of global gas emissions.

Emissions produced by marine transportation activities include Nitrogen Oxide (NO_x), Sulfur Oxide (SO_x), Carbon Monoxide (CO), Carbon dioxide (CO₂), and particulate emissions have a local and global impact. The local effect is for various health problems such as lung, heart, cancer, pneumonia. The global impact is causing global warming and climate change. The International Maritime Organization (IMO) is one of the institutions under the United Nations that the authority to regulate maritime safety, shipping security, and prevention of marine pollution from ship operations. % of global emissions [3].



According to this scenario [4] is expected to triple by 2050, NOx and SOx emissions by 15% (19 million tonnes) and 13% (10.2 million tonnes) respectively, of global emissions if no control measures are in place. IMO issued Marpol Annex VI, to overcome this. One of the rules is to reduce the sulfur emission level from 3.5% to only 0.5% and effective from January 1, 2020. Meanwhile, the regulation of NOx emissions is regulated through Tier II and Tier III and has been valid since January 2016

In addition to the emission factor, the availability of fossil fuels is dwindling, and their price is increasing cause the use of renewable energy to become increasingly popular [5], [6]. Biodiesel is widely known as a vegetable oil fuel with the chemical name methyl ester until now is predicted as a candidate to replace diesel fuel [7]. The process aims to reduce the viscosity of oil and oxygen occurs because the transesterification process can convert large and branched molecules into smaller bio-oil structures and have straight chains. This straight-chain structure and small molecules are needed and suitable for diesel engine combustion. The use of biodiesel in compression engines can reduce the formation of sulfur oxides (SO₂), carbon monoxide (CO), hydrocarbons (HC), and smoke emission is due to the low sulfur, aromatic content, and the presence of oxygen compounds in biodiesel. In addition, biodiesel has other advantages because of its relatively high cetane value when compared to conventional diesel fuel [8], [9]

Ekrem Buyukayya [10] conducted an experimental study on rapeseed oil of 5%, 20%, and 70% against standard diesel fuel and found that engine performance increased and emissions were lower, the percentage of 20% gave optimal results but the advanced study still needed to reduce NOx. Several other researchers [11]–[14] stated that the oxidation in biodiesel during storage influences the properties and characteristics of biodiesel while it was an increase in the level of fuel consumption and a decrease in emissions when compared to using diesel fuel standards

The study conducted in this research is a numerical study to compare how the effect of using ASTM D6751 (Biodiesel), and ASTM D975 (Petro Diesel) at a constant speed of 2200 Rpm on the performance, combustion, and emissions of a single-cylinder diesel engine.

2. Material & Methode

The workflow of this research begins with determining the model in which the data engine specification and fuel properties used can be seen in the following table:

Table 1. Engine Baseline [15]

Engine (four stroke cycle)	TF 85 MH
cylinder	1
Combustion system	Direct injection
Bore x stroke	85 x 87 mm
Displacement	493 cc
Compression ratio	18 : 1
Max engine at full speed	2200
Continuous power output	7,5 kw
Specific fuel consumption	171 gr/hph

Table 2. Fuel Properties [16]

Property	ASTM D975 Petro Diesel	ASTM D6751 Biodiesel
Density at 40 ⁰ (g/cm ³)	0,834	0,85 – 0,90
Spesific Gravity at 40 ⁰ C	0,851	0,88
Flash Point (°C)	60 - 80	100 - 170
Kinematic Viscosity, 40 ⁰ C	2,5	1,9 - 6
Iodine Value (g/100 g oil)	38,30	-

Acid Value (mg KOH/g oil)	0,34	0,8 (max)
Calorific Value (Kj/Kg)	42000	-

The process is to model the combustion chamber and injection system on solid work then the results are exported to Ansys. In addition, the engine data input and setting of the fuel spray direction are also carried out.


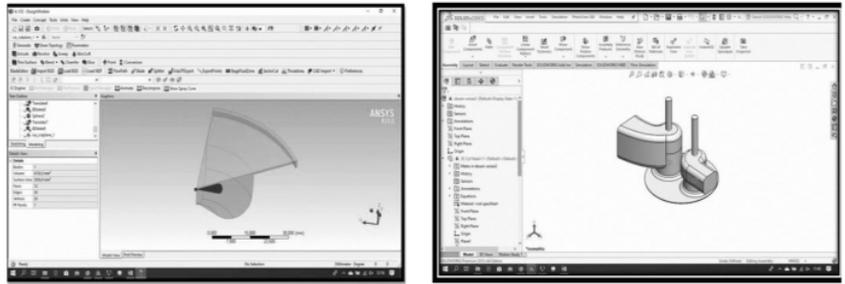


Fig.1. Modelling process in solid work

The process is meshing or forming into smaller cells for the calculation process with the Ansys Forte solver to start. The calculation begins by determining the fuel to be used, determining the injection timing and the mass of the fuel-injected, determining the boundary conditions and the direction of the piston motion, determining the initial and gas mixture. The simulation control process includes determining the crank angle to display, the running process produces graphic visualization, while the rendering process will produce contour output such as displaying pressure, temperature, and velocity visualizations

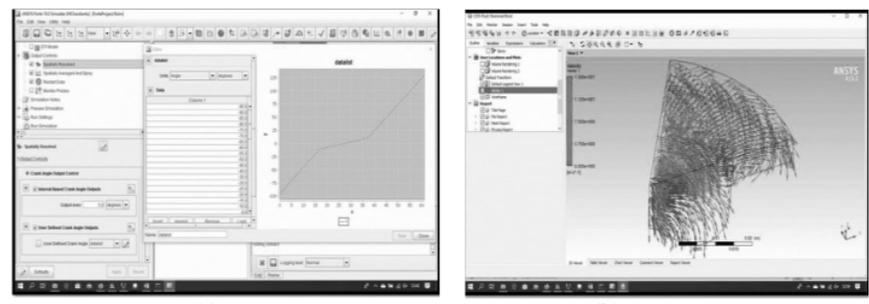

(a) (b)
Fig.2. Setting of Crank Angle (a) and Contour (b)

3. Result & Discussion

From the results of running numerical simulations, we got how to compare the characteristics, the performance, and emissions of the single-cylinder engine Yanmar TF 85 MHi when using [ASTM D975 Petro Diesel](#) and [ASTM D6751 Biodiesel](#) at a speed of 2200 RPM

Table 3. Comparison of performance and combustion values

Cylinder Index	ASTM D975	ASTM D6751
	Petro Diesel	Biodiesel
Gross Indicated Power (kW)	7,589	7,685
IMEP (Mpa)	0,851	0,861
Fuel Mass (gr/cycle)	5,885	6,14
Gross ISFC (g/kW-h)	511,16	527,73
Combustion Eff	30,8	29,97
Thermal Eff	15,68	15,1
Max Pressure (Mpa)	13,9	13,9
Total Chemical Heat Release(J)	815,5	827,4

In table 3 the comparison by changing petrodiesel to biodiesel B20 increased 1.26% and 1.17% in power and IMEP was not too significant. Research conducted by [10], where at higher speeds, the torque delivered with B5 fuel is on average about 2 Nm than the torque produced by diesel fuel. The use of biodiesel causes an increase in fuel consumption rates of up to 3.2% compared to petrodiesel. Most researchers [16]–[19] agreed that engines require more fuel to achieve the same power when using diesel fuel. In addition, lower heating in biodiesel makes the engine consume more fuel to compensate. The higher density of biodiesel causes a higher mass injection for the same volume [20]

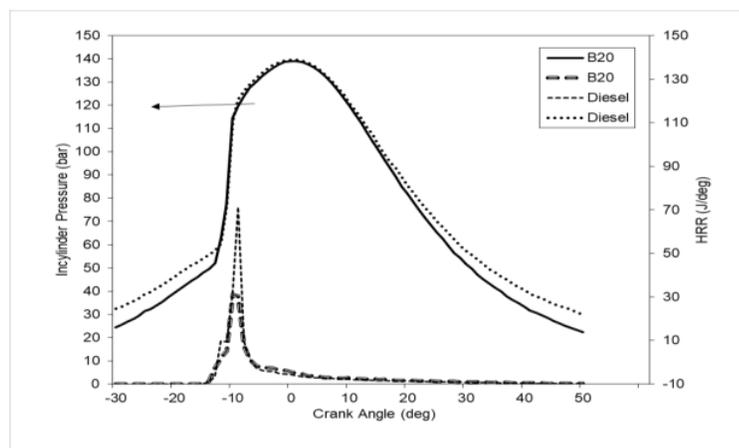


Fig.3. In cylinder Pressure and Heat Release rate

In the graphical of cylinder pressure, there is no significant difference between petrodiesel and biodiesel, with a maximum pressure value of 139 bar. However, for HRR, there is a slight difference where the peak heat increases by 1.45% and the ignition delay value slightly late compared to petrodiesel. One of the causes is because the flashpoint of biodiesel is higher.

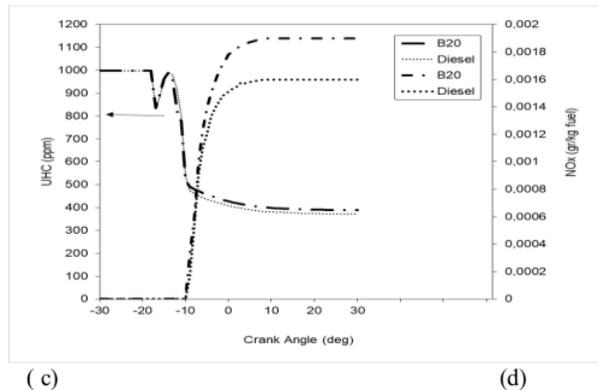


Fig.4 UHC and Nox emission

Carbon monoxide is a dangerous gas produced from an incomplete composition. CO emissions have decreased, in line with what was conveyed by [21] that one of the factors causing the decrease in CO is the higher oxygen content that improves combustion quality. On the other hand, the NOx emission increased by 18.75% similar to that conveyed by Biodiesel, which generally produces NOx is slightly higher in emissions petroleum-based diesel as reported by many researchers. Murillo et al. recorded an increase of up to 16% when tested with recycled oil biodiesel in marine engines[21].

4. Conclusion

In terms of performance, the use of biodiesel at a high engine speed of 2200 rpm causes an increase in power of 1.27 % and 1.17 % in IMEP, higher biodiesel density, and lower temperature causes an increase in fuel consumption which is higher by 3.2% to achieve the same power output. There is no significant increase in-cylinder pressure, the use of biodiesel causes CO and UHC emissions to decrease while NOx increases 18.75% compared to petroleum diesel

5. Acknowledgement

We would like to thank the PP Muhammadiyah Diktilitbang Council for funding research through the RISETMU Batch V grant, Universitas Muhammadiyah Surabaya, and all colleagues who have assisted in the completion of this research.

References

- [1] C. Y. Lin, "Strategies for promoting biodiesel use in marine vessels," *Mar. Policy*, vol. 40, no. 1, 2013, doi: 10.1016/j.marpol.2013.01.003.
- [2] A. Bows-Larkin, S. Mander, P. Gilbert, M. Traut, C. Walsh, and K. Anderson, "High Seas, High Stakes: High Seas Project Final Report," *Tyndall Cent. Clim. Chang. Res.*, 2014.
- [3] C. W. Mohd Noor, M. M. Noor, and R. Mamat, "Biodiesel as alternative fuel for marine diesel engine applications: A review," *Renewable and Sustainable Energy Reviews*, vol. 94, 2018, doi: 10.1016/j.rser.2018.05.031.
- [4] E. Sadeghinezhad, S. N. Kazi, A. Badarudin, C. S. Oon, M. N. M. Zubir, and M. Mehrali, "A comprehensive review of bio-diesel as alternative fuel for compression ignition engines," *Renewable and Sustainable Energy Reviews*, vol. 28, 2013, doi: 10.1016/j.rser.2013.08.003.
- [5] M. M. Maghanaki, B. Ghobadian, G. Najafi, and R. J. Galogah, "Potential of biogas production in Iran," *Renewable and Sustainable Energy Reviews*, vol. 28, 2013, doi: 10.1016/j.rser.2013.08.021.

- [6] O. M. Ali, R. Mamat, and C. K. M. Faizal, "Review of the effects of additives on biodiesel properties, performance, and emission features," in *Journal of Renewable and Sustainable Energy*, 2013, vol. 5, no. 1, doi: 10.1063/1.4792846.
- [7] A. Demirbas, "Progress and recent trends in biofuels," *Progress in Energy and Combustion Science*, vol. 33, no. 1. 2007, doi: 10.1016/j.peccs.2006.06.001.
- [8] F. Lujaji, A. Bereczky, L. Janosi, C. Novak, and M. Mbarawa, "Cetane number and thermal properties of vegetable oil, biodiesel, 1-butanol and diesel blends," *J. Therm. Anal. Calorim.*, vol. 102, no. 3, 2010, doi: 10.1007/s10973-010-0733-9.
- [9] M. Gumus, "A comprehensive experimental investigation of combustion and heat release characteristics of a biodiesel (hazelnut kernel oil methyl ester) fueled direct injection compression ignition engine," *Fuel*, vol. 89, no. 10, 2010, doi: 10.1016/j.fuel.2010.01.035.
- [10] E. Buyukkaya, "Effects of biodiesel on a di diesel engine performance, emission and combustion characteristics," *Fuel*, vol. 89, no. 10, 2010, doi: 10.1016/j.fuel.2010.05.034.
- [11] A. Monyem, J. H. Van Gerpen, and M. Canakci, "The effect of timing and oxidation on emissions from biodiesel-fueled engines," *Trans. Am. Soc. Agric. Eng.*, vol. 44, no. 1, 2001, doi: 10.13031/2013.2301.
- [12] M. P. Dorado, E. Ballesteros, J. M. Arnal, J. Gómez, and F. J. López, "Exhaust emissions from a Diesel engine fueled with transesterified waste olive oil," *Fuel*, vol. 82, no. 11, 2003, doi: 10.1016/S0016-2361(03)00034-6.
- [13] S. Puhan, N. Vedaraman, G. Sankaranarayanan, and B. V. B. Ram, "Performance and emission study of Mahua oil (madhuca indica oil) ethyl ester in a 4-stroke natural aspirated direct injection diesel engine," *Renew. Energy*, vol. 30, no. 8, 2005, doi: 10.1016/j.renene.2004.09.010.
- [14] C. Kaplan, R. Arslan, and A. Sürmen, "Performance characteristics of sunflower methyl esters as biodiesel," *Energy Sources, Part A Recover. Util. Environ. Eff.*, vol. 28, no. 8, 2006, doi: 10.1080/009083190523415.
- [15] B. Ariani, I. M. Ariana, and A. Z. M. Fathallah, "Experimental investigation on natural gas injection to minimize abnormal combustion and methane slip in the diesel-natural gas dual fuel engine at low load," *Int. Rev. Mech. Eng.*, vol. 14, no. 9, 2020, doi: 10.15866/ireme.v14i9.19821.
- [16] D. K. Ramesha, A. S. Bangari, C. P. Rathod, and C. R. Samartha, "Experimental Investigation Of Biogas-Biodiesel Dual Fuel Combustion In A Diesel Engine," *J. Middle Eur. Constr. Des. Cars*, vol. 13, no. 1, 2015, doi: 10.1515/mecdc-2015-0003.
- [17] H. C. Ong, H. H. Masjuki, T. M. I. Mahlia, A. S. Silitonga, W. T. Chong, and T. Yusaf, "Engine performance and emissions using *Jatropha curcas*, *Ceiba pentandra* and *Calophyllum inophyllum* biodiesel in a CI diesel engine," *Energy*, vol. 69, 2014, doi: 10.1016/j.energy.2014.03.035.
- [18] B. Gokalp, E. Buyukkaya, and H. S. Soyhan, "Performance and emissions of a diesel tractor engine fueled with marine diesel and soybean methyl ester," *Biomass and Bioenergy*, vol. 35, no. 8, 2011, doi: 10.1016/j.biombioe.2011.05.015.
- [19] S. Kalligeros *et al.*, "An investigation of using biodiesel/marine diesel blends on the performance of a stationary diesel engine," *Biomass and Bioenergy*, vol. 24, no. 2, 2003, doi: 10.1016/S0961-9534(02)00092-2.
- [20] D. H. Qi, H. Chen, L. M. Geng, and Y. Z. Bian, "Experimental studies on the combustion characteristics and performance of a direct injection engine fueled with biodiesel/diesel blends," *Energy Convers. Manag.*, vol. 51, no. 12, 2010, doi: 10.1016/j.enconman.2010.06.042.
- [21] S. Murillo, J. L. Míguez, J. Porteiro, E. Granada, and J. C. Morán, "Performance and exhaust emissions in the use of biodiesel in outboard diesel engines," *Fuel*, vol. 86, no. 12–13, 2007, doi: 10.1016/j.fuel.2006.11.031.

Hasil Plagiasi Numerical Comparison of B20 Biodiesel and Petroleum Diesel in terms of Performance, Combustion, and Emission at Constant Speed

ORIGINALITY REPORT

21 %
SIMILARITY INDEX

%
INTERNET SOURCES

20%
PUBLICATIONS

13%
STUDENT PAPERS

PRIMARY SOURCES

- 1** Salma Arifah Maulana, Ni Made Utami Dwipayanti. "Perception and Factors associated with Zero Waste Lifestyle among University Students in Medical Faculty, Udayana University, Bali", IOP Conference Series: Earth and Environmental Science, 2022
Publication **3%**
- 2** C.W. Mohd Noor, M.M. Noor, R. Mamat. "Biodiesel as alternative fuel for marine diesel engine applications: A review", Renewable and Sustainable Energy Reviews, 2018
Publication **3%**
- 3** Submitted to West Coast University
Student Paper **3%**
- 4** D. K. Ramesha, Adhiviraj Singh Bangari, Chirag P. Rathod, Chaitanya R. Samartha. "Experimental Investigation Of Biogas-Biodiesel Dual Fuel Combustion In A Diesel **2%**

Engine", Journal of Middle European Construction and Design of Cars, 2015

Publication

5

Submitted to Heriot-Watt University

Student Paper

2%

6

Nguyen Thi Thuy, Vo Tran Diem Ngoc, Nguyen Thi Cam Tien, Dang Van Thanh, Nguyen Trung Thanh, Tran Tien Khoi, Nguyen Nhat Huy.

"Study on river water treatment by photocatalysis using metal-modified titania nanotubes", IOP Conference Series: Earth and Environmental Science, 2022

Publication

7

S G Pradeep, N R Banapurmath, Y H Basavarajappa, Sharanabasava V Ganachari, Akshay M Vastrad. "Effects of piston and cylinder swirl generation on the performance of ceiba pentandra and nigella sativa B20 biodiesel blended diesel engine operation", IOP Conference Series: Materials Science and Engineering, 2021

Publication

8

V Mathan Raj, Abhinav Chaitanya, Harsh Thakur. "Improvement in the performance of Simarouba blended diesel fuel using Di-Ethyl Ether and Di-Methyl Carbonate as additives in a CRDI engine", Journal of Physics: Conference Series, 2021

2%

9

E Prihastanti, S Haryanti. "Response to growth of mangrove seeds with additional extract of natural materials and vitamin b1 in the planting medium", IOP Conference Series: Earth and Environmental Science, 2022

Publication

1 %

10

M R Ubaidillah, M N Cahyadi. "Low Cost GNSS Trimble BD982 and U-blox Performance Test Analysis F9 Series for Several Measurement Methods (Case Study: Sidoarjo Regency)", IOP Conference Series: Earth and Environmental Science, 2022

Publication

1 %

Exclude quotes On

Exclude matches < 20 words

Exclude bibliography On